


EV70



Indoor Unit

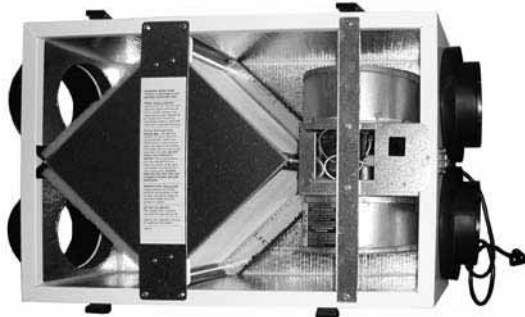

Specifications

Ventilation Type: Static Plate, Heat and Humidity Transfer				
Typical Airflow Range: 40-70 CFM				
Unit may be mounted in any orientation				
Number Motors: One, 0.08 hp				
V	HZ	Phase	Input Watts	FLA
120	60	Single	84 @ 73 CFM	0.9
Control: On board 24 VAC transformer/relay package with switched dry contacts				
Filters: MERV 8, spun polyester media. 7-1/2" x 10-1/2" x 1"				
Weight: 39 lbs (unit), 50 lbs (in carton)				
Shipping Dimensions: 29-1/2" L x 21-1/2" W x 14-1/2" H (in carton)				
Options: PTL - Percentage Timer Control PBL - Push Button Point-of-Use Controls FM - Percentage Timer Control with Furnace Interlock DH24 - Dehumidistat Control Wall Caps				

G5 Performance

Airflow CFM	ESP in H ₂ O	Temp EFF%	Total EFF% Winter/Summer*
47	0.40	80	75/62
61	0.30	77	72/58
77	0.20	74	68/53
92	0.10	71	64/49

* (See HVI certification report on page 66 for complete certified rating).

Dimensions

