

# EV200



## Indoor Unit



## G4 Performance


Airflow CFM	ESP in H <sub>2</sub> O	Temp EFF%	Total EFF% Winter/Summer*
122	0.70	82	74/59
149	0.65	80	72/56
168	0.50	79	70/55
176	0.40	78	69/54
186	0.30	77	68/53
192	0.20	77	68/52
200	0.10	76	67/52

\* (See HVI certification report on page 66 for complete certified rating).

## Specifications

Ventilation Type: Static Plate, Heat and Humidity Transfer				
Typical Airflow Range: 100-200 CFM				
Number Motors: One, 0.1 hp				
V	HZ	Phase	Input Watts	FLA
120	60	Single	157 @ 181 CFM	1.5
Control Voltage: 24 VAC				
Filters: MERV 8, spun polyester media. 10 1/2" x 21 3/4" x 1"				
Weight: 70 lbs (unit), 82 lbs (in carton)				
Shipping Dimensions: 21 1/2"W x 32"L x 29"H				
Options: PTL - Percentage Timer Control PBL - Push Button Point-of-Use Controls FM - Percentage Timer Control with Furnace Interlock DH24 - Dehumidistat Control Wall Caps				

## Dimensions

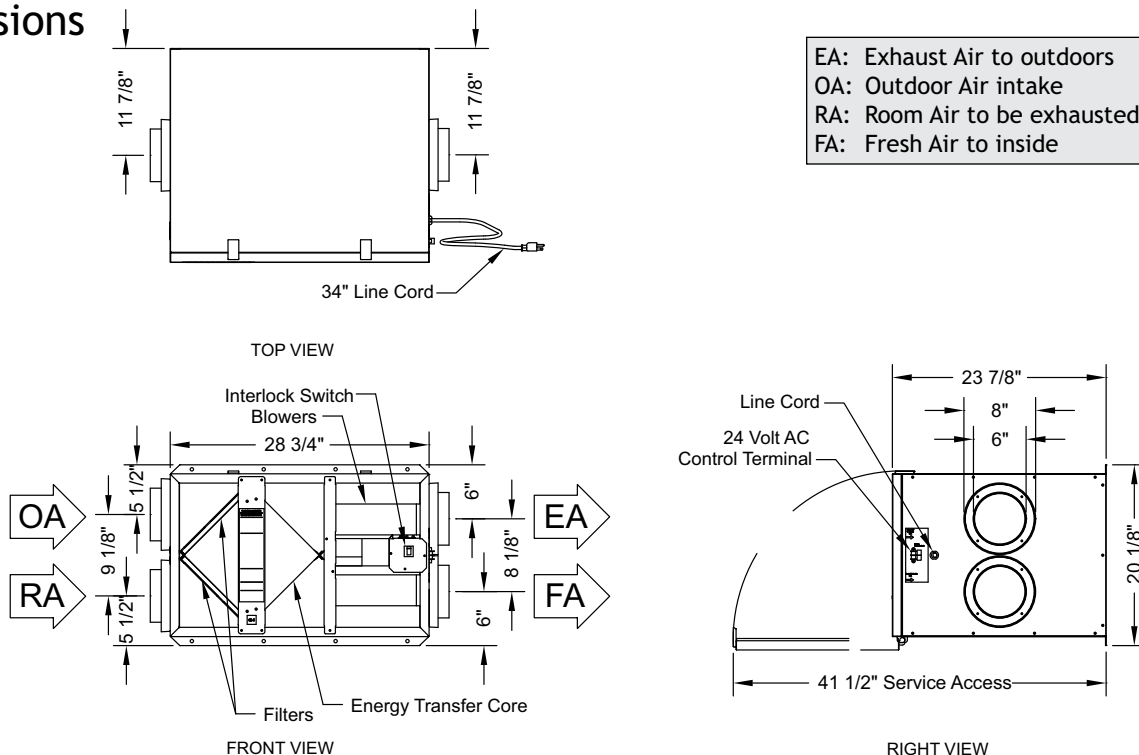

EA: Exhaust Air to outdoors  
 OA: Outdoor Air intake  
 RA: Room Air to be exhausted  
 FA: Fresh Air to inside