


# EV70



## Indoor Unit

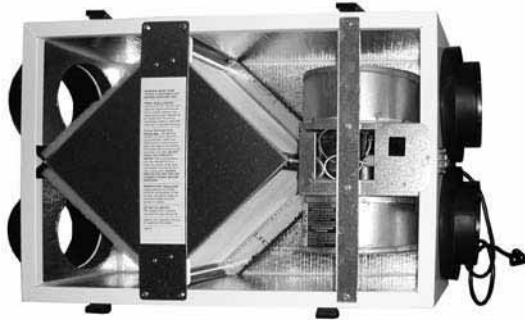

## Specifications

Ventilation Type: Static Plate, Heat and Humidity Transfer				
Typical Airflow Range: 40-70 CFM				
Unit may be mounted in any orientation				
Number Motors: One, 0.08 hp				
V	HZ	Phase	Input Watts	FLA
120	60	Single	94 @ 69 CFM	0.9
Control Voltage: 24 VAC				
Filters: MERV 8, spun polyester media. 7 1/2" x 10 1/2" x 1"				
Weight: 39 lbs (unit), 48 lbs (in carton)				
Shipping Dimensions: 21 1/2"W x 29"L x 14 1/2"H				
Options: PTL - Percentage Timer Control PBL - Push Button Point-of-Use Controls FM - Percentage Timer Control with Furnace Interlock DH24 - Dehumidistat Control Wall Caps				

## G4 Performance

Airflow CFM	ESP in H <sub>2</sub> O	Temp EFF%	Total EFF% Winter/Summer*
46	0.40	81	74/60
59	0.30	78	71/57
73	0.20	74	68/53
86	0.10	71	64/49

\* (See HVI certification report on page 66 for complete certified rating).

## Dimensions

