

HEIXINH




Indoor Unit



Specifications

Ventilation Type: Static Plate, Heat and Humidity Transfer					
Typical Airflow Range: 250-925 CFM					
AHRI 1060 Certified Core: One L125-00					
Airflow Rating Points (for AHRI): 750 CFM and 560 CFM					
Number Motors: Two					
V	HZ	Phase	FLA	Min. Cir. Amps	Max. Fuse Size
115	60	Single	8.6	19.4	25
208-230	60	Single	4.3	9.7	15
277	60	Single	2.4	5.4	15
208-230	60	Three	2.1	5.2	15
460	60	Three	1.1	2.6	15
Control Voltage: 24 VAC					
Filters: Two total, MERV 8, 2" pleated, 20" x 20" nominal size					
Weight: 211 lbs (unit), 250 lbs (shipping weight)					
Shipping Dimensions: 44" W x 56" L x 27" H					

G5 Performance

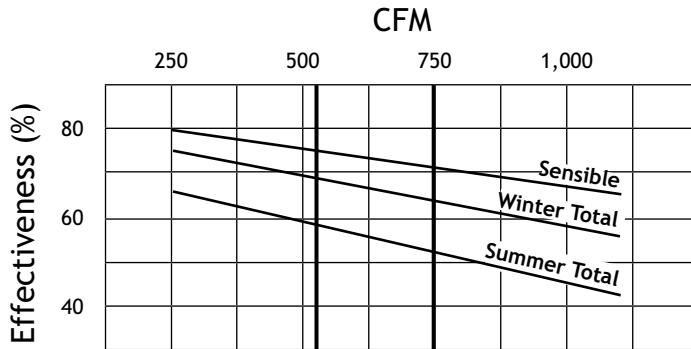

*At AHRI 1060 standard conditions
(See certified data on page 67 for core components.)

Airflow Performance

Motor HP Phase	External Static Pressure (Inches Water Column)						
	0.0	0.25	0.5	0.75	1.0	1.25	1.5
0.75 (Two DD) Single Phase	970 CFM 1,490 Watts	925 CFM 1,375 Watts	860 CFM 1,270 Watts	795 CFM 1,160 Watts	720 CFM 1,030 Watts	635 CFM 950 Watts	350 CFM 750 Watts
0.75 (Two DD) Three Phase	1,030 CFM 1,220 Watts	1,010 CFM 1,210 Watts	975 CFM 1,160 Watts	880 CFM 1,050 Watts	800 CFM 990 Watts	700 CFM 850 Watts	530 CFM 720 Watts

HEIXINH UNIT DIMENSIONS

EA: Exhaust Air to outdoors
 OA: Outdoor Air Intake
 RA: Room Air to be exhausted
 FA: Fresh Air to inside

