


# EV300



## Indoor Unit

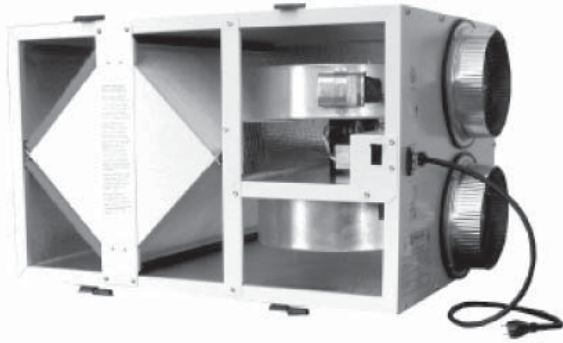

## Specifications


Ventilation Type: Static Plate, Heat and Humidity Transfer				
Typical Airflow Range: 150-300 CFM				
Number Motors: One, 0.2 hp				
V	HZ	Phase	Input Watts	FLA
120	60	Single	317 @ 295 CFM	3.3
Control Voltage: 24 VAC				
Filters: Cleanable, spun polyester media. 10 1/2" x 21 3/4" x 1"				
Weight: 88 lbs (unit), 95 lbs (in carton)				
Shipping Dimensions: 21 1/2"W x 32"L x 29"H				
Options: PT - Percentage timer control PB - Push Button point-of-use controls FM - Percentage timer control with furnace interlock DH24 - Dehumidistat control Wall caps				

## G4 Performance

Airflow CFM	ESP in H2O	Temp EFF%	Total EFF% Winter/Summer*
93	1.0	85	76/62
163	0.9	79	70/55
202	0.8	76	67/51
253	0.7	72	62/47
279	0.6	70	60/44
295	0.5	68	59/43
315	0.4	67	57/41

\* (See HVI certification report on page 11 for complete certified rating).

## Dimensions

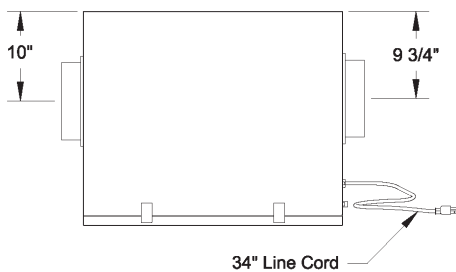

EA: Exhaust Air to outdoors  
OA: Outdoor Air intake  
RA: Room Air to be exhausted  
FA: Fresh Air to inside

