


# HE 6XRT

## Energy Recovery Ventilator Standard

### ROOFTOP UNIT

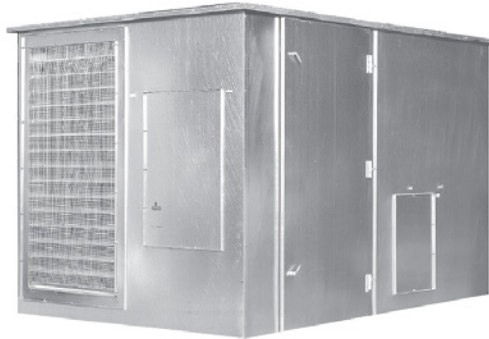

Energy Recovery Core is AHRI Certified®



### SPECIFICATIONS

**Ventilation Type:**

Static plate, heat and humidity transfer

**Typical Airflow Range:** 1,500-6,500 CFM

**AHRI 1060 Certified Core:**

Six L125-G5

**Standard Features:**

- TEFC Premium efficiency motors
- Motor starters
- Non-fused disconnect
- 24 VAC transformer/relay package
- Cross-core differential pressure ports

**Filters:**

Total qty. 12, MERV 8: 20" x 20" x 2"

**Unit Weight:**

2,301-3,166 lbs., varies by option(s)

**Max. Shipping Dimensions & Weight (on pallet):**

116" L x 90" W x 90" H  
3,599 lbs.

**Motor(s):**

Qty. 2, Belt drive blower/standard motor packages with adjustable sheaves (see table below)

**Options:**

- Onboard variable frequency drives (VFDs) - both airstreams
- Shaft grounding ring on motors with VFDs
- Fused disconnect
- Integrated programmable controls - enhanced, premium
- Class 1 low leakage motorized isolation dampers - OA, EA or both airstreams
- Qty. 2, Factory mounted filter alarms - both airstreams
- Double wall construction
- Exterior paint - white, custom colors

**Accessories:**

- Filters - MERV 13, 2" (shipped loose)
- Automatic balancing damper - 4", 5", 6"
- Roof curb - standard 14"
- Curb wind clip
- Engineered combo curb for Carrier RTU
- Engineered combo curb for Trane RTU
- Digital time clock - wall mount (TC7D-W), in exterior enclosure (TC7D-E)
- Carbon dioxide sensor/control - wall mount (CO2-W), duct mount (CO2-D)
- IAQ sensor - wall mount (IAQ-W), duct mount (IAQ-D)
- Motion occupancy sensor/control - ceiling mount (MC-C), wall mount (MC-W)
- Smoke Detector - duct mount (SD-D)
- Electric duct heater - EK series (1-175 kW); designed for indoor ductwork installation only
- Indirect gas-fired duct furnace - GH series (50-400 MBH), installed downstream of any fans

### AIRFLOW PERFORMANCE

Motor HP	Blower RPM	Sheave Adj. Turns Open	External Static Pressure (in. w.g.)																	
			0.00		0.25		0.50		0.75		1.00		1.25		1.50		1.75		2.00	
			CFM	BHP	CFM	BHP	CFM	BHP	CFM	BHP	CFM	BHP	CFM	BHP	CFM	BHP	CFM	BHP	CFM	BHP
5.0	1460	4.5	5005	3.2	4800	3.2	4650	3.1	4475	3.0	4200	2.9	4000	2.8	3750	2.8	3400	2.7	3100	2.5
	1610	2	5550	4.2	5375	4.2	5250	4.1	5100	4.1	4900	4.0	4650	3.9	4500	3.8	4250	3.7	4000	3.6
	1725	0						5525	5.0	5475	5.0	5200	4.9	5050	4.8	4800	4.6	4600	4.5	
7.5	1560	4.5	5275	3.7	5200	3.6	4900	3.5	4775	3.5	4550	3.4	4350	3.3	4125	3.3	3875	3.2	3575	3.1
	1740	2	5950	5.0	5825	5.0	5625	4.9	5490	4.9	5325	4.8	5125	4.7	4950	4.7	4750	4.6	4525	4.5
	1865	0	6500	6.5	6350	6.5	6225	6.4	6125	6.4	5910	6.3	5825	6.2	5625	6.1	5410	6.1	5300	6.0

**Note:** Brake Horse Power (BHP) is for one blower motor package only.   Operation in this zone will likely exceed FLA limits.

**Note:** Airflow performance includes effect of clean, standard filter supplied with unit.

### ELECTRICAL DATA

Standard Electrical Specifications							Optional Factory Installed VFD Electrical Specifications		
HP	Volts	HZ	Phase	FLA per motor	Min. Cir. Amps	Max. Overcurrent Protection Device	FLA per motor	Min. Cir. Amps	Max. Overcurrent Protection Device
5.0	208-230	60	Three	14.5-13.4	32.6	45	14.5-13.4	35.9	45
	460	60	Three	6.7	15.1	20	6.7	16.6	20
	575	60	Three	5.3	11.9	15	5.3	13.1	15
7.5	208-230	60	Three	21.0-19.0	47.3	60	21.0-19.0	52.0	60
	460	60	Three	9.5	21.4	25	9.5	23.5	25
	575	60	Three	7.6	17.1	20	7.6	18.8	20

**HE6XRT** Energy Recovery Ventilator Standard

