

LE 10XINV

Energy Recovery Ventilator Standard



INDOOR UNIT



Energy Recovery Core is AHRI Certified®



SPECIFICATIONS

Ventilation Type:
Static plate, heat and humidity transfer

Typical Airflow Range: 2,500-11,000 CFM

AHRI 1060 Certified Core: Ten L125-G5

Standard Features:
TEFC Premium efficiency motors
Motor starters
Non-fused disconnect
24 VAC transformer/relay package
Rubber vibration isolators
Cross-core differential pressure ports

Filters: Total qty. 20, MERV 8: 20" x 25" x 2"

Unit Weight:
Modular (per module) 1,127-2,222 lbs., varies by option(s)
Assembled (1-piece) 2,858-3,788 lbs., varies by option(s)

Max. Shipping Dimensions & Weight (on pallet):
Modular (2-modules) 120" L x 90" W x 78" H
Module 1 - 2,442 lbs., Module 2 - 1,792 lbs.
Assembled (1-piece) 240" L x 90" W x 78" H - 4,228 lbs.

Motor(s): Qty. 2, Belt drive blower/standard motor packages with choice of adjustable sheaves for low, medium or high blower speed. (see table below)

Options:
Spring vibration isolators
Onboard variable frequency drives (VFDs) - both airstreams
Shaft grounding ring on motors with VFDs
Fused disconnect
Integrated programmable controls - enhanced, premium
Class 1 low leakage motorized isolation dampers - OA, RA or both
Qty. 2, Factory mounted filter alarms - both airstreams
Double wall construction
Exterior paint - white, custom colors

Accessories:
Filters - MERV 13, 2" or 4"; MERV 8, 4" (shipped loose)
Automatic balancing damper - 4", 5", 6"
Digital time clock - wall mount (TC7D-W), in exterior enclosure (TC7D-E)
Carbon dioxide sensor/control - wall mount (CO2-W), duct mount (CO2-D)
IAQ sensor - wall mount (IAQ-W), duct mount (IAQ-D)
Motion occupancy sensor/control - ceiling mount (MC-C), wall mount (MC-W)
Smoke Detector - duct mount (SD-D)
Electric duct heater - EK series (1-175 kW)
Indirect gas-fired duct furnace - GH series (50-400 MBH), installed downstream of any fans

AIRFLOW PERFORMANCE

Airflow CFM	External Static Pressure (in.w.g.)																				
	0.00		0.25		0.50		0.75		1.00		1.25		1.50		1.75		2.00				
	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM			
							3 HP LOW SPEED				3 HP MED SPEED		3 HP HIGH SPEED								
2500							1.1	710	1.3	790	1.6	870	1.8	950	2.1	1000	2.4	1050			
3000							1.3	730	1.5	810	1.8	880	2.0	950	2.3	1010	2.6	1070			
3500							1.4	750	1.7	830	2.0	900	2.3	960	2.6	1020	2.9	1080			
4000							1.6	770	1.9	840	2.2	910	2.5	980	2.9	1040	3.2	1100			
4500							1.6	710	1.9	790	2.2	860	2.5	930	2.8	990	3.2	1050	3.5	1110	5 HP HIGH SPEED
5000			1.6	670	1.9	740	2.1	810	2.5	880	2.8	940	3.1	1000	3.5	1060	3.9	1120			
5500		1.6	640	1.9	710	2.2	770	2.5	840	2.8	900	3.1	960	3.5	1020	3.8	1080	4.2	1130	7.5 HP MED SPEED	
6000	3 HP LOW SPEED	2.0	690	2.2	750	2.5	810	2.8	870	3.1	920	3.5	980	3.9	1040	4.2	1090	4.6	1150		
6500	3 HP LOW SPEED	2.4	740	2.6	790	2.9	850	3.2	900	3.6	950	3.9	1000	4.3	1060	4.7	1110	5.1	1160	7.5 HP HIGH SPEED	
7000	5 HP LOW SPEED	2.8	790	3.1	830	3.4	880	3.7	930	4.0	980	4.4	1030	4.8	1080	5.2	1130	5.6	1170		
7500	5 HP LOW SPEED	3.3	830	3.6	880	3.9	920	4.2	970	4.6	1010	4.9	1050	5.3	1100	5.7	1140	6.1	1190	10 HP HIGH SPEED	
8000	5 HP MED SPEED	3.9	880	4.2	920	4.5	960	4.8	1000	5.1	1040	5.5	1080	5.9	1120	6.3	1160	6.7	1200		
8500	5 HP MED SPEED	4.5	930	4.8	960	5.1	1000	5.4	1030	5.8	1070	6.1	1100	6.5	1140	6.9	1180	7.3	1210		
9000	7.5 HP LOW SPEED	5.2	970	5.5	1000	5.8	1030	6.1	1060	6.4	1100	6.8	1130	7.1	1160	7.5	1190	7.9	1220		
9500	7.5 HP LOW SPEED	5.9	1010	6.2	1040	6.5	1060	6.8	1090	7.1	1120	7.5	1150	7.8	1180	8.2	1210	8.5	1230		
10000	7.5 HP LOW SPEED	6.7	1040	7.0	1070	7.3	1090	7.6	1120	7.9	1140	8.2	1170	8.5	1190	8.9	1220	9.2	1240		
10500	7.5 HP MED SPEED	7.5	1080	7.8	1100	8.1	1120	8.4	1140	8.7	1160	9.0	1190	9.3	1210	9.6	1230	10.0	1250		
11000		8.4	1100	8.6	1120	8.9	1140	9.2	1160	9.5	1180	9.8	1200	Note: Airflow performance includes effect of clean, standard filter supplied with unit.							
	10 HP MED SPEED						10 HP HIGH SPEED														

ELECTRICAL DATA

Standard Electrical Specifications							Optional Factory Installed VFD Electrical Specifications		
HP	Volts	HZ	Phase	FLA per motor	Min. Cir. Amps	Max. Overcurrent Protection Device	FLA per motor	Min. Cir. Amps	Max. Overcurrent Protection Device
3.0	208-230	60	Single	14.7-14	33.1	40	9.38-8.48	40.2	45
3.0	208-230	60	Three	9.38-8.48	21.1	25	9.38-8.48	23.2	25
	460	60	Three	4.24	9.5	15	4.24	10.5	15
	575	60	Three	3.3	7.4	15	3.3	8.2	15
5.0	208-230	60	Three	14.5-13.4	32.6	45	14.5-13.4	35.9	45
	460	60	Three	6.7	15.1	20	6.7	16.6	20
	575	60	Three	5.3	11.9	15	5.3	13.1	15
7.5	208-230	60	Three	21.0-19.0	47.3	60	21.0-19.0	52.0	60
	460	60	Three	9.5	21.4	25	9.5	23.5	25
	575	60	Three	7.6	17.1	20	7.6	18.8	20
10.0	208-230	60	Three	27.0-24.4	60.8	80	27.0-24.4	66.8	80
	460	60	Three	12.2	27.5	35	12.2	30.2	35
	575	60	Three	9.76	22.0	30	9.76	24.2	30




LE10XINV Energy Recovery Ventilator Standard

ABBREVIATIONS
 EA: Exhaust Air to outside
 OA: Outside Air intake
 RA: Room Air to be exhausted
 FA: Fresh Air to inside

INSTALLATION ORIENTATION
 Unit must be installed in orientation shown.

NOTE
 1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE ROUNDED TO THE NEAREST EIGHTH OF AN INCH.
 2. SPECIFICATIONS MAY BE SUBJECT TO CHANGE WITHOUT NOTICE.
 3. DUCT CLEARANCE FROM DAMPER BLADE WHEN FULLY OPENED TO BE 2". SMACNA RULES APPLY.

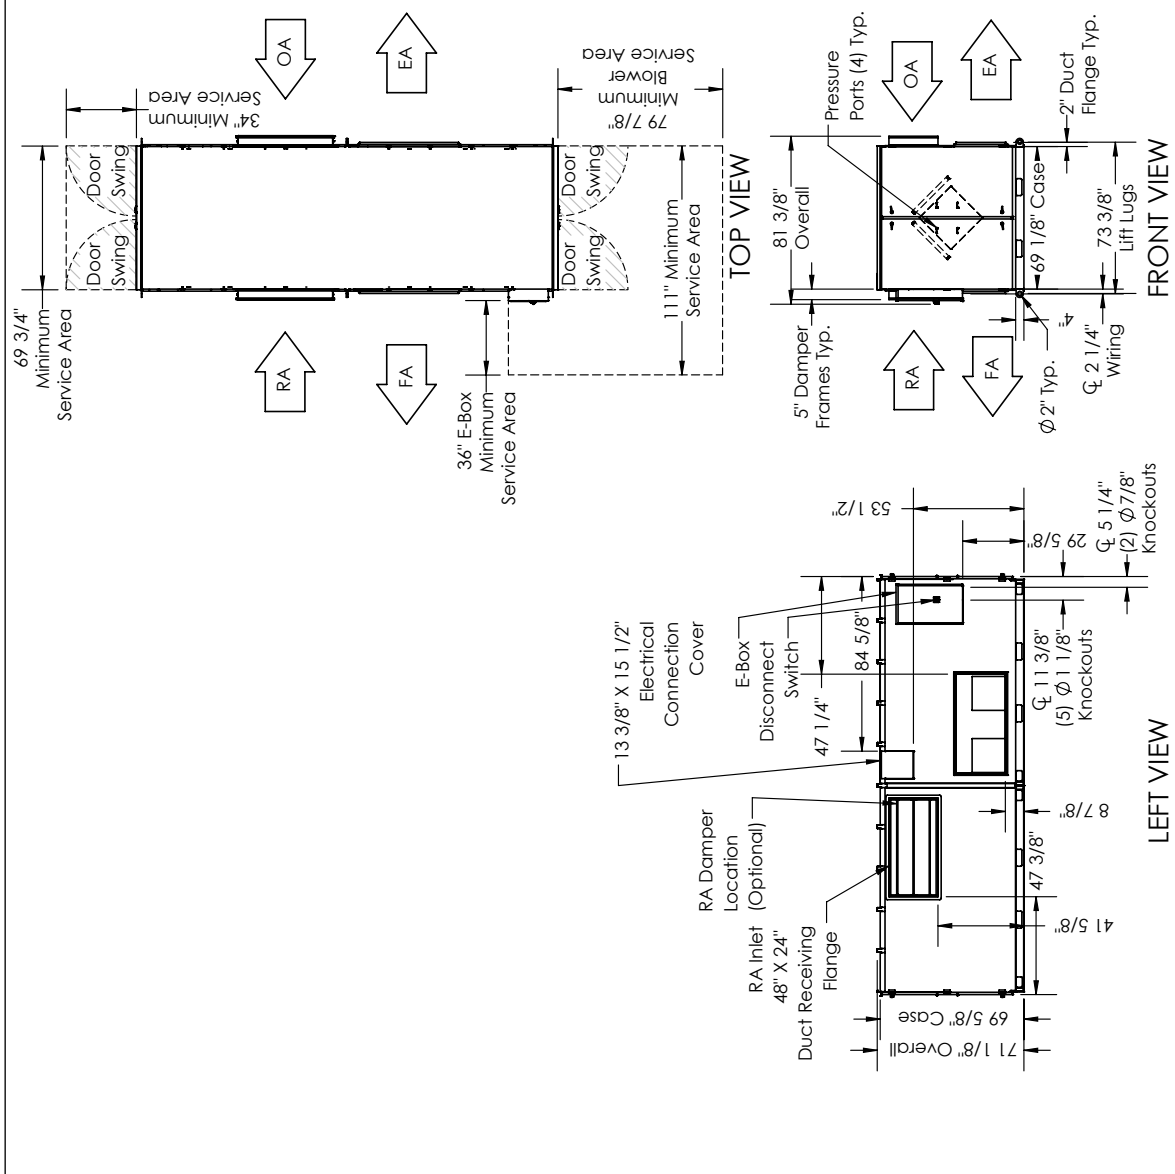

AIRFLOW ORIENTATION
 Available as shown in dimension drawing.



UNIT MOUNTING & APPLICATION
 Must be mounted as shown. RA/EA airstream can be switched with OA/FA airstream unless certain options are selected.

